



# LG1010 Speaker Replacement

How to replace the speaker in a LG1010 cellular phone.

Written By: Nicholas Schmidt





## TOOLS:

- Flathead 3/32" or 2.5 mm Screwdriver (1)
  - T6 Torx Screwdriver (1)
-

## Step 1 — Speaker



- Remove the two plastic screw covers below the inside phone screen.

## Step 2



- Unscrew both screws using a Torx T6 screwdriver.




## Step 3




- Pry off screen front cover with a straight 3mm screwdriver.

## Step 4

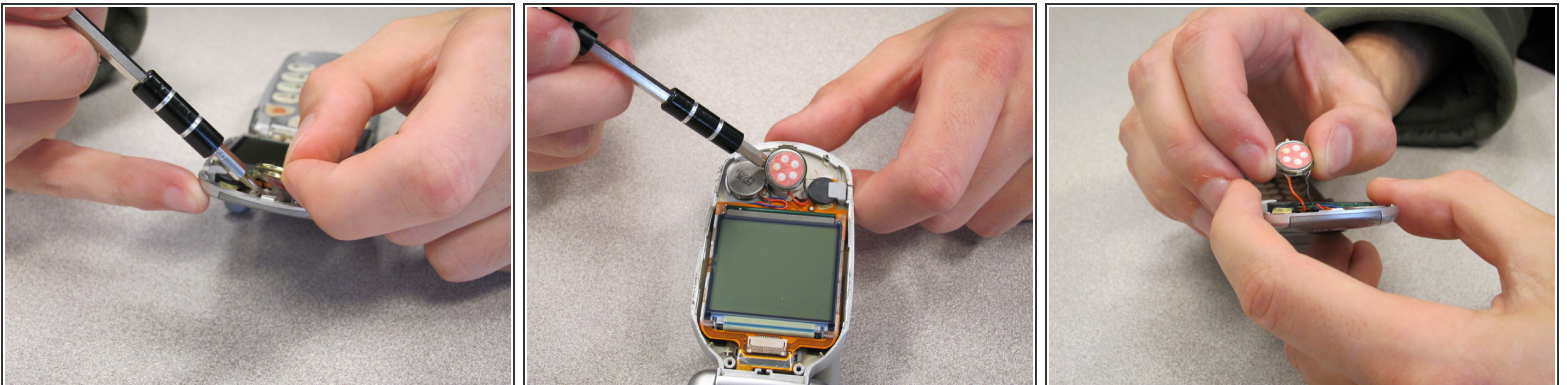


- Pry off the speaker which is glued on to the front cover using a Small Flathead Screwdriver.

## Step 5

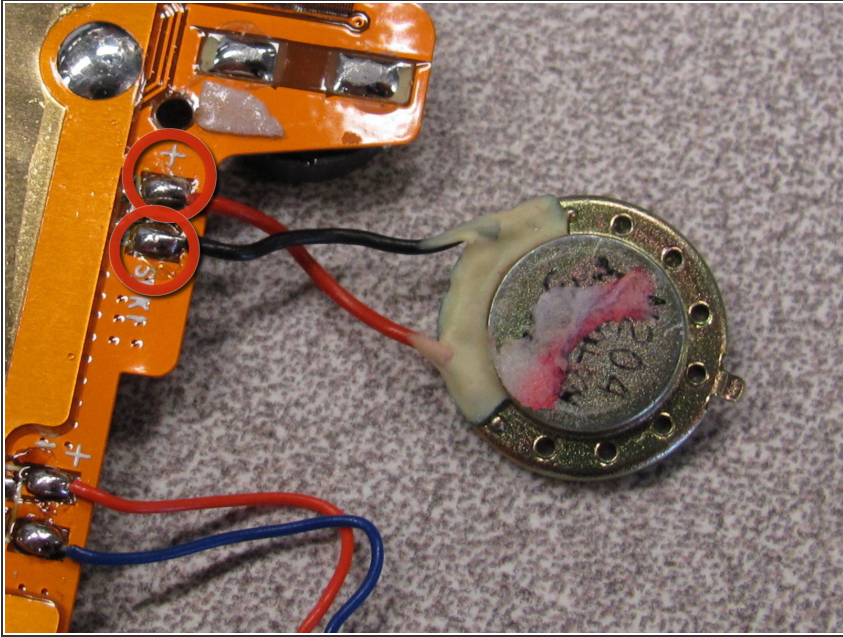

- Unsolder the black and red wires of the speaker from where they are attached to the base of the screen.


## Step 6

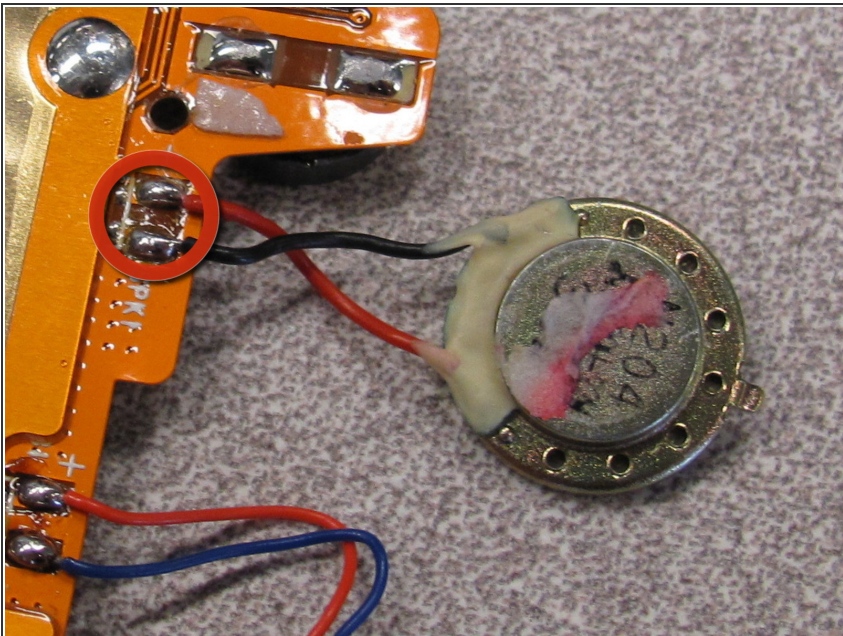

- Obtain replacement speaker and solder the new black and red wires back onto base of the screen.



## Step 7

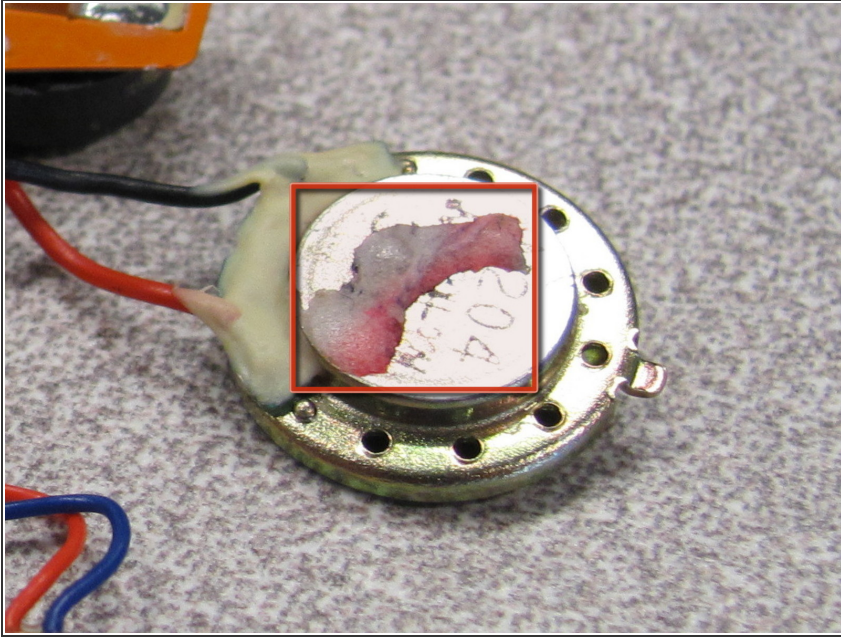

- Apply glue to the back of the speaker and place it back in its original position.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 01:02:52 AM.